

## FB15-2S

### **Prime rating**

- Meets latest India CPCBII as per G.S.R 771(E) dated 11/12/2013 and its further amendments.
- Meets CPCB / MOEF norms as per G.S.R 371(T) dated 17/05/2002 and its further amendments.



**Alternator Technical Data** 

Voltage Variation (%)

Rated Full load current (A)

#### **Genset Technical Data** Genset Rating (kVA) 15 No of Phases 1 **Power Factor** 8.0 Voltage (V) 230 Frequency (Hz) 50 20.9 Current (A) Controller Type Manual Starting System 12 V D.C. Genset Weight (kg) 685 Noise @ 75% load (dBA) < 75 @ 1m Genset Dimensions (LxWxH) (mm) 1911 X 836 X 1194 **Battery Type** 12 Volt Circuit Breaker Rating (A) 63A

Engine Technical Data	
Engine Model	FBD2-1.2D2
Engine Speed (rpm)	1500
Engine Volume (I)	1.2
Rated Power (kW)	16.2
No. of cylinder	2
Bore (mm)	87
Stroke (mm)	100
Compression Ratio	17.5:1
Aspiration	TC-IC
Cooling System	Liquid Cooled
Cooling System Capacity (I)	5.5
Governing	Electronic / Isochronous

Alternator Make	Mecc-Alte
No of Bearings	Single Bearing
Alternator model	ECP 28 1.5L/4A
Alternator rating	15
Class of insulation	Н
Coupling details	SAE3/11.5"


+/- 1

65.2

Fuel & Oil Systems Technical Data	
Fuel System	CRDI
Type Of Fuel	HSD
Genset Fuel Tank Capacity (I)	75
Fuel Consumption - @ 100% Load (I/hr)*	3.88
Fuel Consumption - @ 75% Load (I/hr)	3.02
Fuel Consumption - @ 50% Load (I/hr)	2.3
Fuel Consumption Tolerance	0 to +5%
Lube Oil change period (hrs)	500
Oil Type	15W40 CH4
Oil capacity (I)	4.5
Oil Consumption @100% load (I/hr)	< 0.1% of FC

\*sp.gr of fuel - 0.835kg/litre Standard operating conditions as per ISO3046 Prime Rating as per ISO8528

# FB15-2S

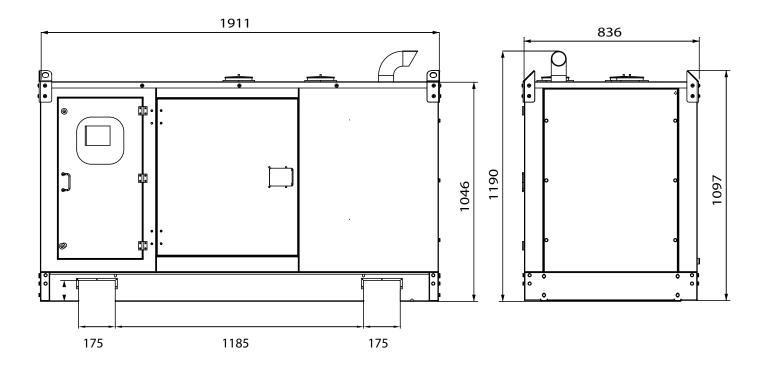

De	Dealer Contact Details								

### FG Wilson manufactures product in the following locations:

Northern Ireland • Brazil • China • India • USA
With headquarters in Northern Ireland, FG Wilson operates through a Global Dealer Network. To contact your local Sales Office please visit the FG Wilson website at www.FGWilson.com.

FG Wilson is a trading name of Caterpillar (NI) Limited.